



## MEGAMAN® FL AUDII

### LED Flood Light

MEGAMAN® FL AUDII is a light projection lamp series with symmetrical rotation of the illumination circle axis. Its light intensity curve shows concentric circles. When installed side-by-side, the light spots on the illuminated surface are superimposed on each other, so that the oval light spots with uniform illumination can be obtained with a variety of angles and installation and control modes to meet various outdoor application scenarios.

### Product Features

- High corrosion resistance, die-cast aluminum housing
- High quality tempered glass cover
- DC24V, AC230V~ power supply optional
- Available optical distributions 8°/15°/30°/ 40°/ 60°
- Available in white, monochromatic colours, RGB, RGBW and tunable white
- DMX512 control system Optional
- Fixed installation with grass inserts and mounting strips



IP65

IK08

### Applications


- ✕ Landscape
- ✕ Building
- ✕ Tower
- ✕ Bridge



## General Information

Input Voltage / Frequency	DC24V / 170-240 VAC~ 50/60Hz
Power Factor	1, >0.9 RGB/DMX512
Dimmability	Non-Dim
CRI	>Ra80
Colour Consistency	≤5
Lifetime	30000hrs L70B50@Ta25°C
IP	IP65
Protection Class	CL I, CLIII
Glow Wire	750
Flickering Percentage	≤3% @100Hz
Material & Colour	Aluminium+Polycarbonate / GR
Installation	Surface Mounted

## Photometric Data

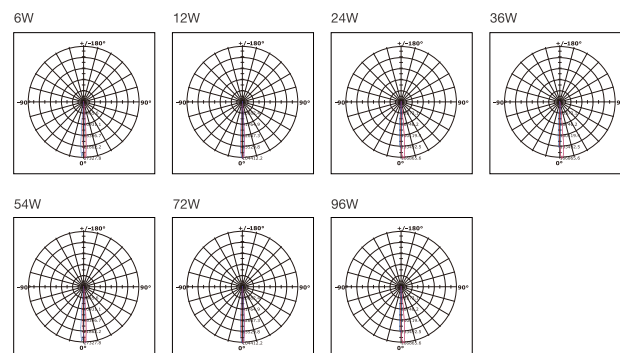

170-240V  
Input Voltage



30000hrs  
Long Lifespan

Model No.	Wattage (W)	Luminous Flux @4000K Ra80 (lm)	Dimension (mm)	Beam Angle (°)	Colour Temperature
YKE15	6	600	85*96*155	8 / 15 / 30 / 45 / 60	RGB/DMX512
YKE15	12	1200	85*96*155	8 / 15 / 30 / 45 / 60	RGB/DMX512
YKE15	24	2400	130*136*169	8 / 15 / 30 / 45 / 60	RGB/DMX512
YKE15	36	3600	130*136*169	8 / 15 / 30 / 45 / 60	RGB/DMX512
YKE15	54	5400	160*172*213	8 / 15 / 30 / 45 / 60	RGB/DMX512
YKE15	72	7200	180*180*242	8 / 15 / 30 / 45 / 60	RGB/DMX512
YKE15	96	9600	210*222*273	8 / 15 / 30 / 45 / 60	RGB/DMX512